
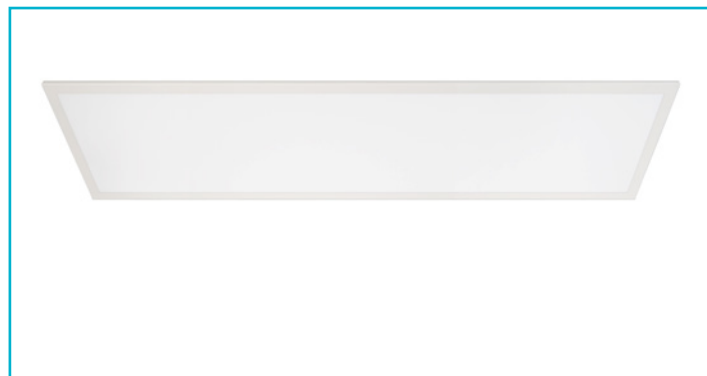


LED panel**Basic Office 300x1,200 mm, 30.5 W, 4,000 K, white****Special features**

- For insertion into grid ceilings
- Can be installed in surface-mount or flush-mount frames
- Suitable for workplaces with screens in accordance with EN 12464-1 BAP65
- Microprismatic surface structure
- Suitable for office spaces, reception rooms and hallways
- Good value, ready-to-install solution
- Incl. CC power supply, 900 mAh, 33-38 V, 36 W

Housing Material	Aluminium
Housing Color	White
Material of Lens	Plastic
Surface Structure of Lens	Microprismatic
Suitable for Computer Workstations	Yes
Mounting Type	Installation mounting
Mounting Location	Inside
Mounting Area	Ceiling installation
Protection Class Lamp	Protection class III/safety extra-low voltage
Protection Class Power Plug	Protection class II/protective insulation
Rated Input	30.5 W
Rated Input Voltage	220-240 V/AC
Power Supply Unit incl.	Yes
Dimmable	No
Motion Detector	No

Width	1195 mm
Height	32 mm
Product weight	2050 g
Working Temperature	-20 to 45 °C
Storage Temperature	-40 to 80 °C
IP Protection Class	IP 40
IK Protection Class	IK03
Max. units per MCB B10	10 PCS
Max. units per MCB B16	16 PCS
Max. units per MCB C10	17 PCS
Max. units per MCB C16	26 PCS
Life Time L80 / B50	50000 h
Switching Cycles	100000
Power Consumption	31 kWh/1000h
EEI	E

Light Source	LED, Light source not changeable
Color Temperature	4000 K
Colour Consistency	3 SDCM
Colour consistency light source	3 SDCM
CRI (Ra)	80
Rated Luminous Flux	4000 lm
Luminous Efficiency	131.1 lm/W
Rated Angle of Reflection	90 Degree
UGR	19

Light Exit Surfaces	1
Light characteristics	Direct
Light direction	Below

Length	295 mm
---------------	--------

